


ORNAMENTAL  
TOP NUT




NOTE: ALL STREET NAME SIGNS  
SHALL BE MADE FROM 9" PLATES  
WITH 6" LETTERS (SEE STREET  
SPEC'S)

PLATE HOLDER  
WITH STAR HOLE



INSTALL NO MORE THAN  
THREE SIGN BLADES ON  
ANY SINGLE POST


GALVINIZED 5/8" SQUARE  
CENTER ROD



USE STAINLESS STEEL 5/16" BOLTS,  
WASHERS AND NYLON INSERT LOCK  
NUTS FOR ALL GROUND AND  
OVERHEAD MOUNTED SIGNS.



W14-2A 36" X 8" "NO  
OUTLET" SIGN MAY BE  
INSTALLED IN CONJUNCTION  
WITH THE STREET NAME SIGNS  
WHERE A STANDARD W14-2  
SIGN DOES NOT WORK.

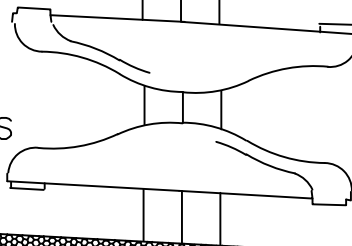


POST CAP, TOP NUT &  
PLATE HOLDER SHALL BE  
GREEN

9" NAME  
PLATES



ROD IS WELDED  
TO POST CAP

NOTE:  
3" DIA. POST SHALL BE  
MOUNTED IN A 10" DIA. BY 3'  
DEEP CONCRETE FOOTING  
FLARED OUT ON THE BOTTOM. A  
DOWEL SHALL BE PLACED  
THROUGH THE POST 1' UP  
FROM THE BOTTOM OF THE  
FOOTING OR THE PIPE CRIMPED.

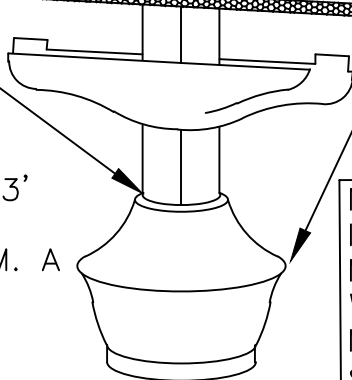

POST CAP WITH TWO  
ALLEN SET SCREWS

NOTE:  
IF A STOP SIGN IS REQUIRED,  
MOUNT ON THE SAME POST  
WITH THE STREET NAME  
MARKERS. LOWEST SIGN  
SHALL BE MOUNTED 7'-8'  
ABOVE THE TOP OF CURB.



STANDARD DETAILS  
STREET NAME MARKER  
CITY OF PLYMOUTH

PUBLISHED  
1-18

CITY PL. NO.  
STRT-24  
REVISED 3-16