




STANDARD DETAILS  
WETLAND MITIGATION DETAIL  
CITY OF PLYMOUTH

PUBLISHED  
1-24

CITY PL. NO.  
ST-13  
REVISED 3-12

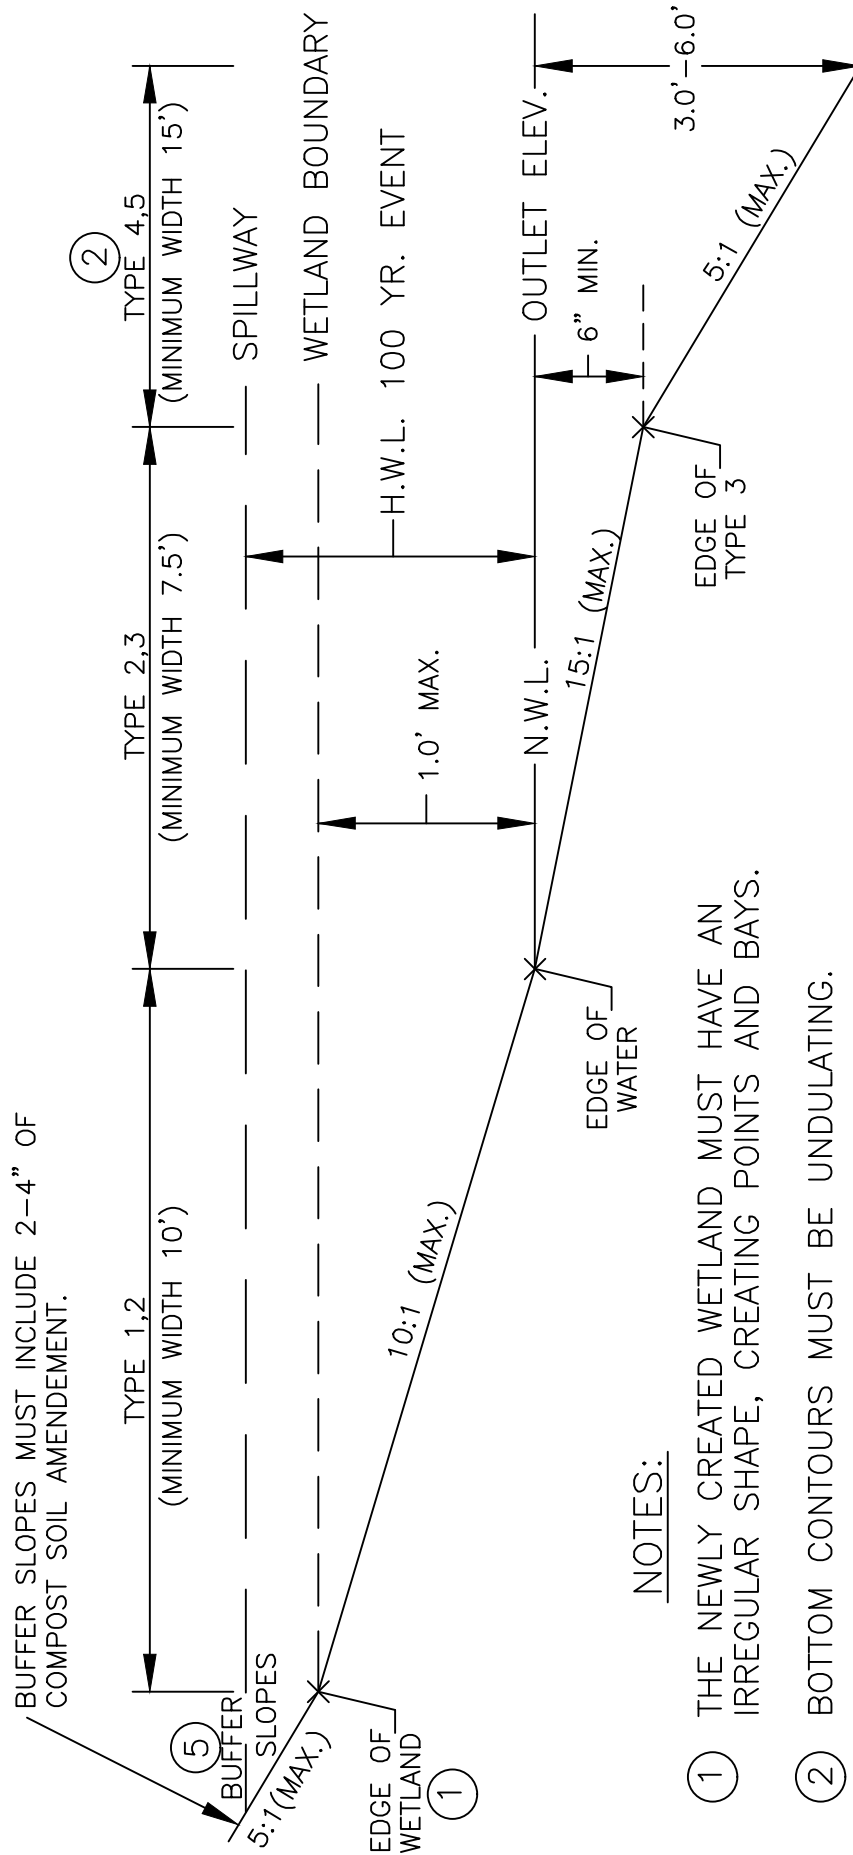

NOTES:

- ① THE NEWLY CREATED WETLAND MUST HAVE AN IRREGULAR SHAPE, CREATING POINTS AND BAYS.
- ② BOTTOM CONTOURS MUST BE UNDULATING.
- ③ RE-VEGETATE WITH BWSR MIX #W8.
- ④ WETLAND BUFFER ZONE WITH MAXIMUM 5:1 SLOPE IS REQUIRED.
- ⑤ 2"-4" SOIL AMENDMENT REQUIRED. SOIL AMENDMENT SHALL BE APPLIED TO VOLUME REQUIREMENTS.