
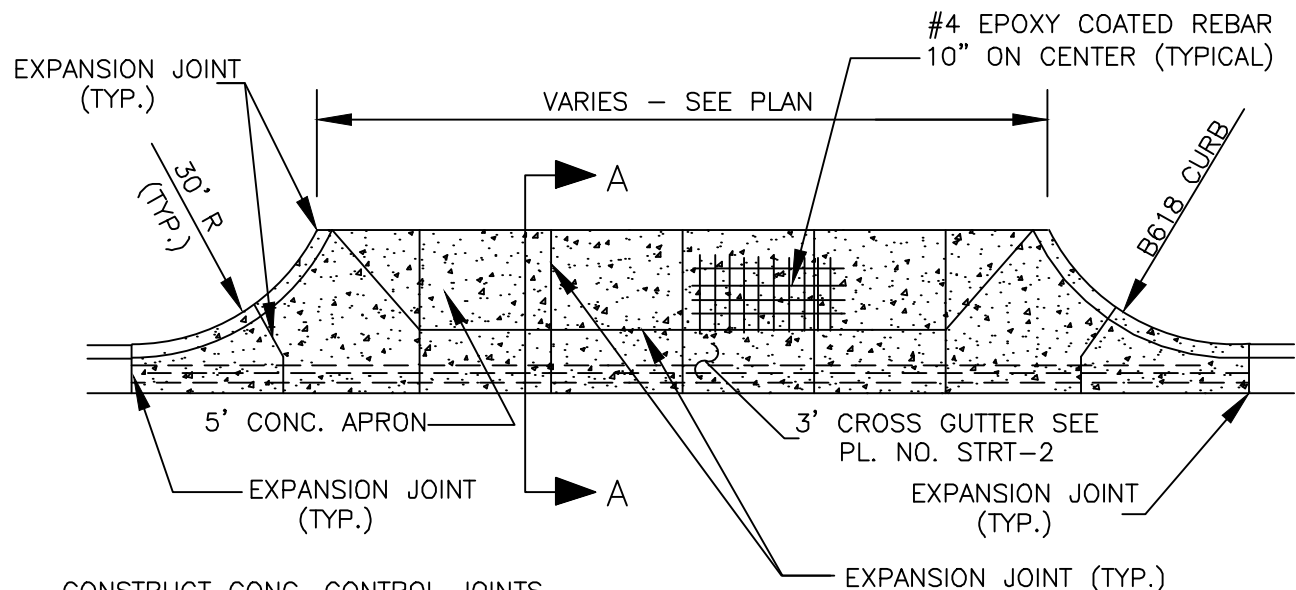


MINIMUM DRIVEWAY WIDTH - 24 FEET  
MAXIMUM DRIVEWAY WIDTH - 36 FEET

#4 EPOXY COATED REINFORCING RODS PLACED 10" ON CENTER IN BOTH DIRECTIONS THROUGH OUT THE SLAB. THEY SHALL BE PLACED TO BE 3" CLEAR OF SLAB EDGES.

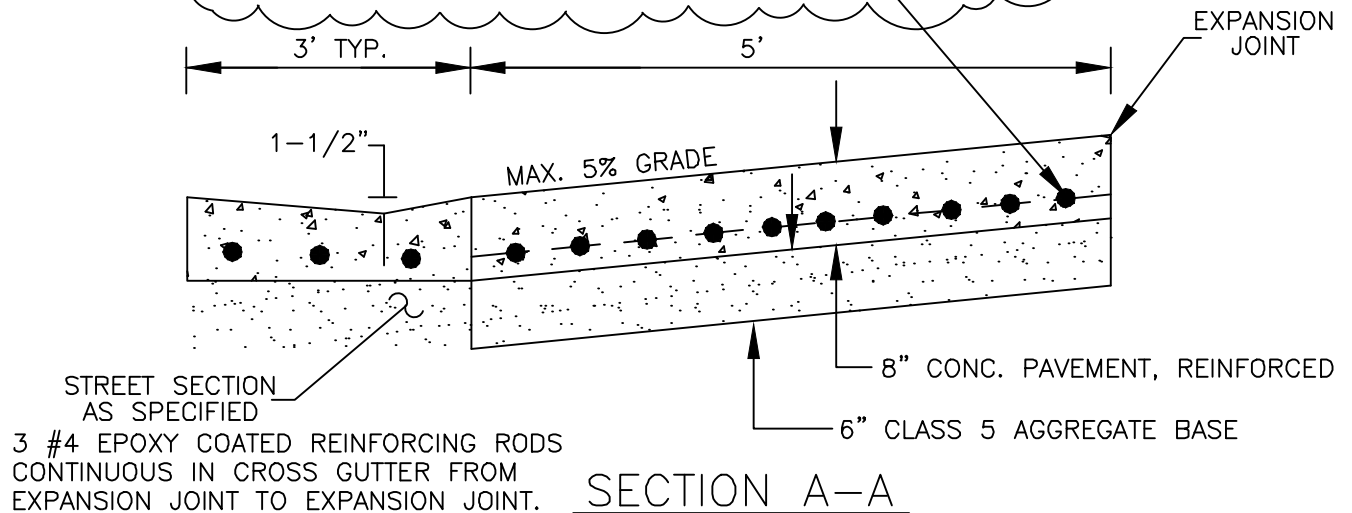

CONSTRUCT CONC. CONTROL JOINTS SUCH THAT NO PANEL IS GREATER THAN 100 SQ. FT.

PLAN

SEE PLATES NO. STRT-3 TO 8 FOR PED. CURB RAMPS IF SIDEWALK OR TRAIL IS EXISTING OR TO BE INSTALLED.

NOTE: DRIVEWAY SHALL BE CONSTRUCTED AS A MONOLITHIC POUR. CURB SHALL NOT BE RUN THROUGH THE DRIVE BUT STOPPED AT THE BEGIN AND END RADIUS.



STANDARD DETAILS  
INDUSTRIAL / COMMERCIAL DRIVEWAY  
CITY OF PLYMOUTH

PUBLISHED  
1-19

CITY PL. NO.  
STRT-12  
REVISED 3-13