

MORTAR JOINT INSIDE AND OUTSIDE STRUCTURE,
WHERE DRAIN PIPE COMES INTO MANHOLE
OR CATCH BASIN.


SUBDRAIN

TRIM EXCESS PIPE
CLOSE TO INSIDE WALL
OF STRUCTURE


PREFORMED HOLES REQUIRED ON NEW
STRUCTURES FOR SUBDRAIN CONNECTIONS.
CORE DRILL SUBDRAIN HOLES FOR ANY
ADDITIONAL CONNECTIONS TO NEW OR
EXISTING STRUCTURES.

CONNECTION

MANHOLE OR CATCH
BASIN WALL

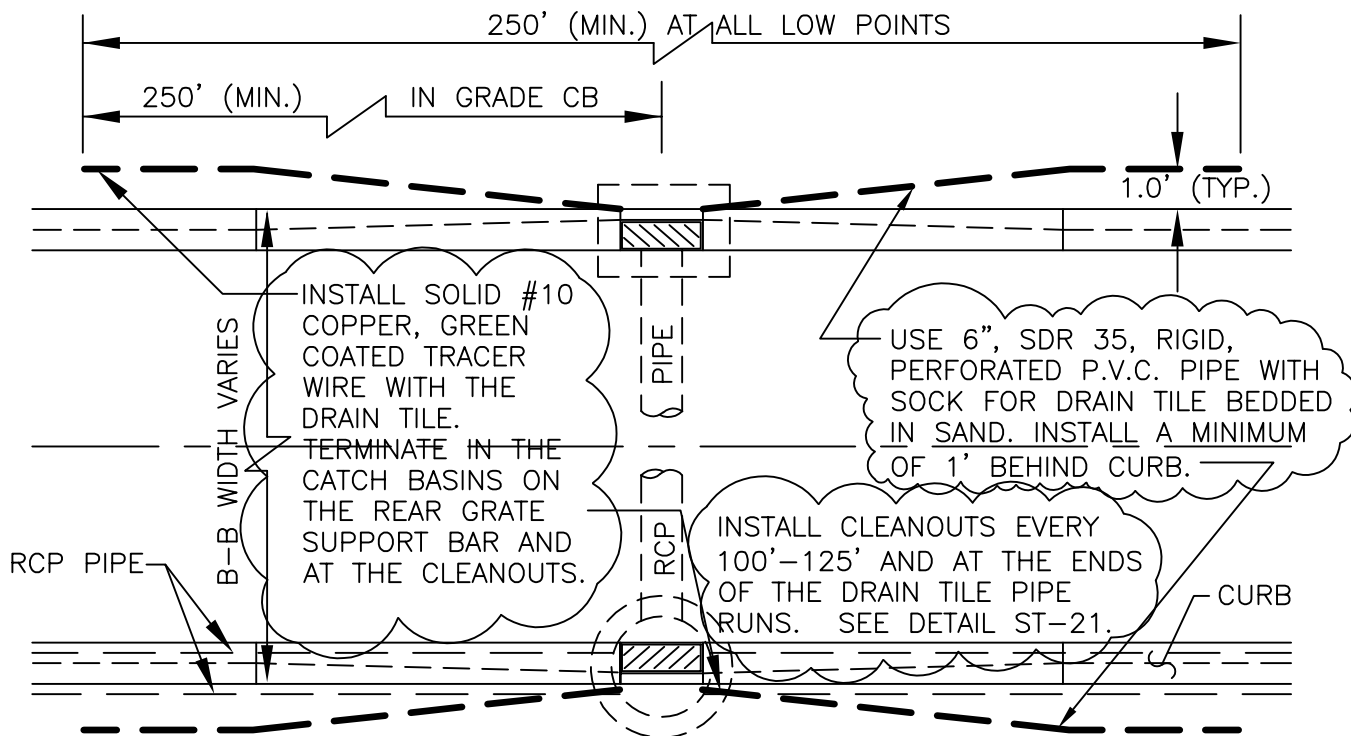

6" RIGID PERFORATED DRAINTILE IS REQUIRED AT ALL LOW POINT CATCH BASINS AND ON THE UPHILL SIDE OF ALL IN-GRADE CATCH BASINS. BENDS MAYBE USED UP TO $22\frac{1}{2}$ DEGREES WITH THE RIDGE DRAIN TILE. FLEXIBLE 6" DRAIN TILE CAN BE USED IN CUL-DE-SACS.

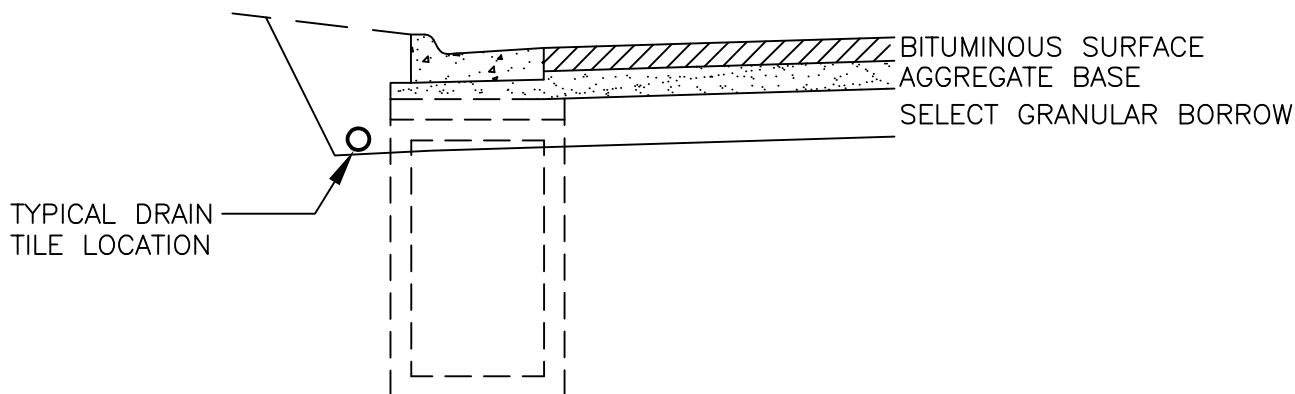

STANDARD DETAILS
SUBDRAIN DETAILS
CITY OF PLYMOUTH

PUBLISHED
1-20

CITY PL. NO.
ST-9
REVISED 1-17