


EOF's SHALL BE ARMORED. GRANITE RIP-RAP OR CABLE CONCRETE SHALL BE PLACED ON TOP OF NONWOVEN GEOTEXTILE FABRIC.

RESTRAIN ALL JOINTS ON THE INLET AND OUTLET PIPES.

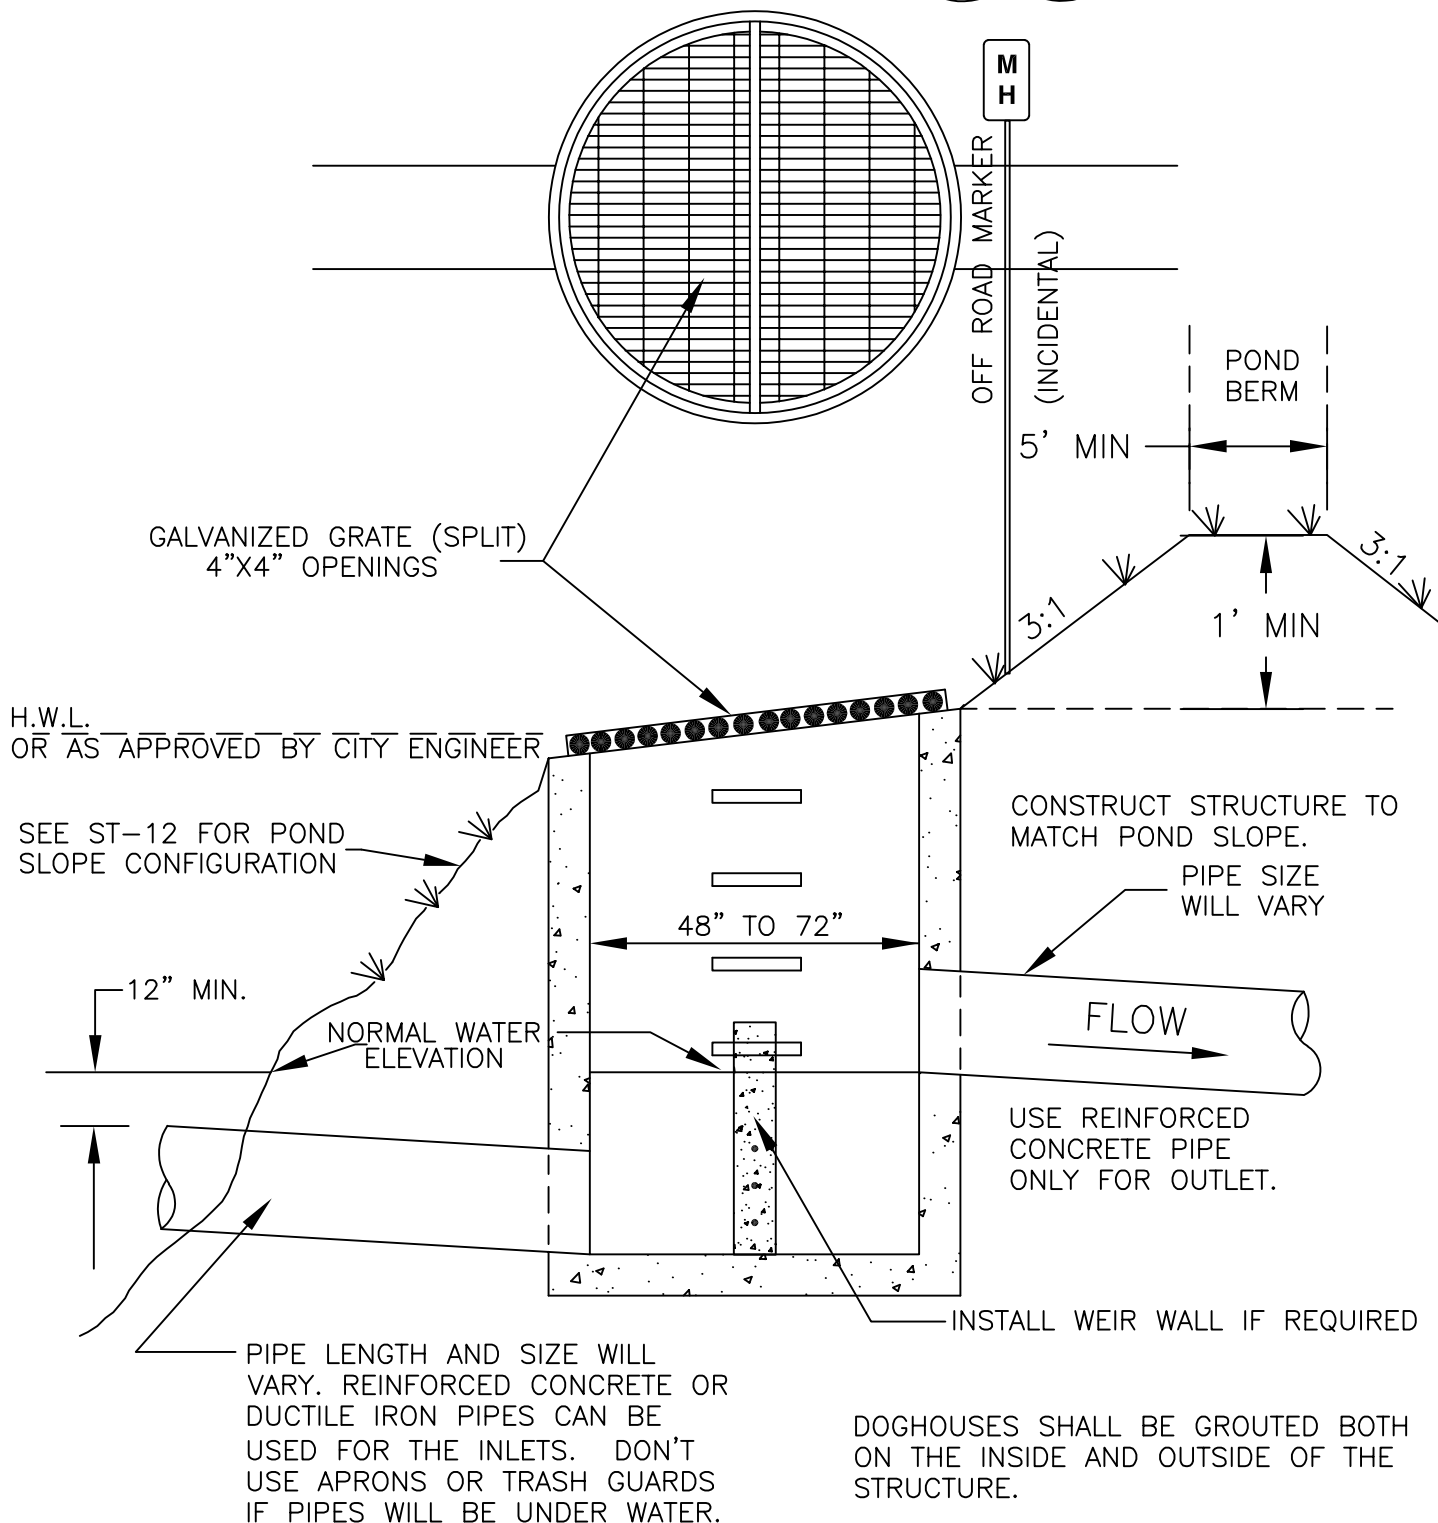

STANDARD DETAILS  
SKIMMER STRUCTURE  
CITY OF PLYMOUTH

PUBLISHED  
3-23

CITY PL. NO.  
ST-15  
REVISED 3-23