




## PLAN VIEWS

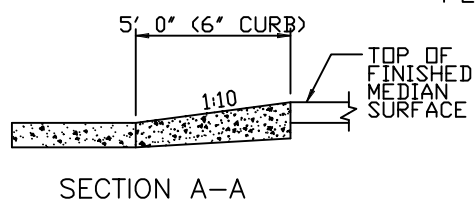


SECTION A-A




SECTION B-B

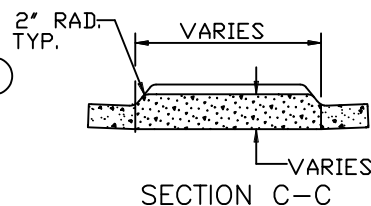

SECTION C-C

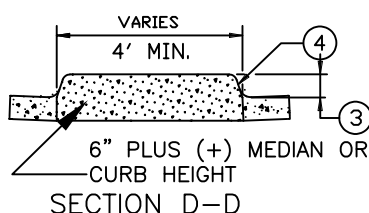

SECTION D-D

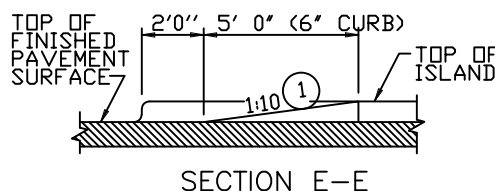

SECTION E-E

NOTES:

- ① TYPICAL SLOPE ALONG GUTTER LINE EACH DIRECTION.
- ② GUTTER, IF REQUIRED.
- ③ VARIABLE MEDIAN OR CURB HEIGHT.
- ④ SHAPE SAME AS MEDIAN OR CURB.
- ⑤ PROVIDE SIGN POST EMBEDMENT ASSEMBLY PER DETAIL STRT-23 IF THIS AREA HAS ANY TYPE OF PAVING.
- ⑥ INSTALL R4-7, 24" X 30" (KEEP RIGHT) AND OM1-2, 18" X 18" (OBJECT MARKER) SIGNS ON A SINGLE POST IN EACH ISLAND NOSE.
- ⑦ ALL ISLAND CONCRETE FLAT WORK SHALL BE PLACED ON A MIN. OF 4" OF CL 5 AGGREGATE BASE.
- ⑧ MEDIANS WIDE ENOUGH TO HAVE PLANTING BEDS MUST INCLUDE 4" THICK, 2' WIDE CONCRETE MAINTENANCE STRIP FOLLOWING TOP BACK OF CURB ON BOTH SIDES FROM NOSE TO NOSE



STANDARD DETAILS  
CONCRETE ISLAND APPROACH NOSE DETAIL  
CITY OF PLYMOUTH

PUBLISHED  
3-23

CITY PL. NO.  
STRT-9  
REVISED 1-20