



TRAFFIC DIRECTION



BACK OF CURB

MINIMUM 24"

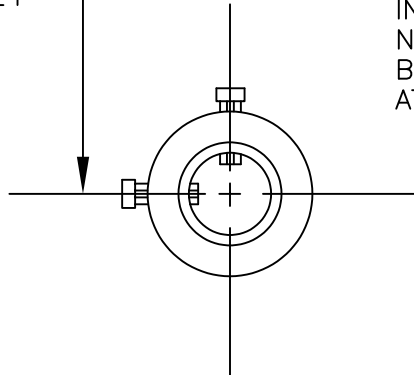

NOTE:
CARE MUST BE TAKEN TO MAKE
SURE SIGN COLLAR IS INSTALLED
IN A TRUE PLUMB POSITION.
NON-PLUMB INSTALLATION WILL
BE CORRECTED BY THE CONTRACTOR
AT NO ADDITIONAL COST TO THE CITY.


NOTE: USE LYLE TYPE SIGN MOUNTING
BRACKETS, BR-95 OR APPROVED EQUAL

INSTALL COLLAR ASSEMBLY ABOVE
SURFACE OF WALK, TRAIL OR MEDIAN.

SET SCREWS MUST BE ACCESSABLE
WITH A WRENCH.

TOP OF CONCRETE OR BIT.

13 1/2" (TYP.)

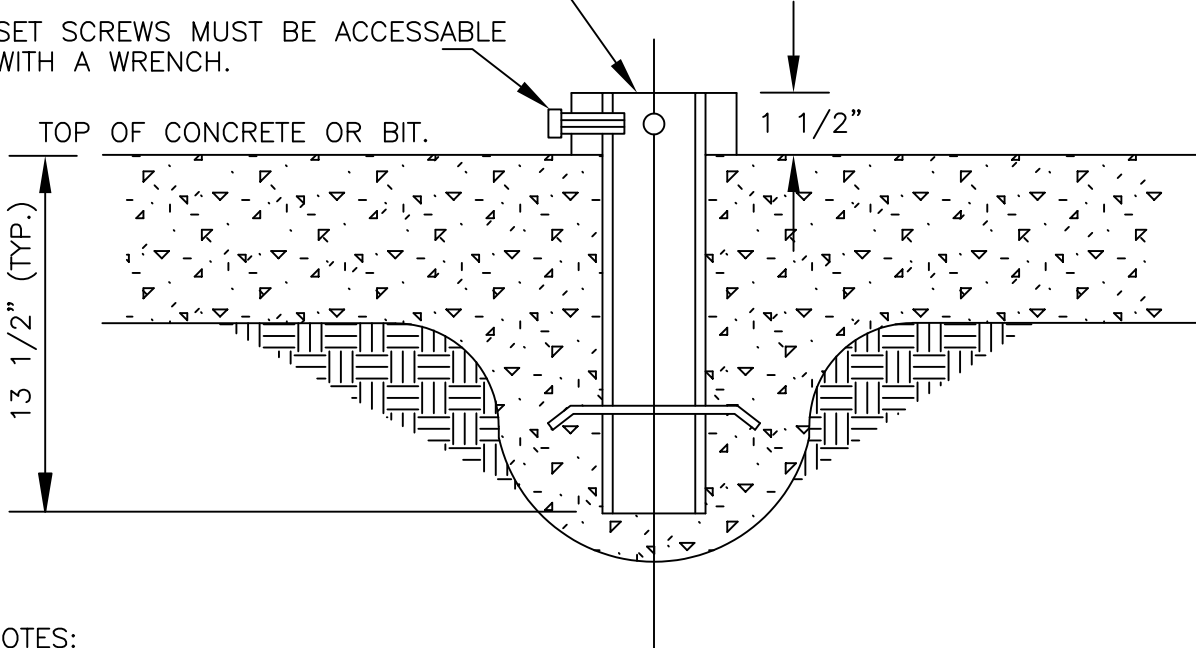

NOTES:

STANDARD COLLAR LENGTH IS 15", EXCEPTIONS
SHALL BE APPROVED BY THE CITY ENGINEER.

MINNEAPOLIS STYLE SIGN POST ASSEMBLY MUST BE USED.
USE 2 3/8" OUTSIDE DIAMETER GALVANIZED STEEL SIGN POST.



STANDARD DETAILS
SIGN POST EMBEDMENT ASSEMBLY
CITY OF PLYMOUTH

PUBLISHED
3-23

CITY PL. NO.
STRT-23
REVISED 3-11