


TRAFFIC DIRECTION



BACK OF CURB

MINIMUM 24"

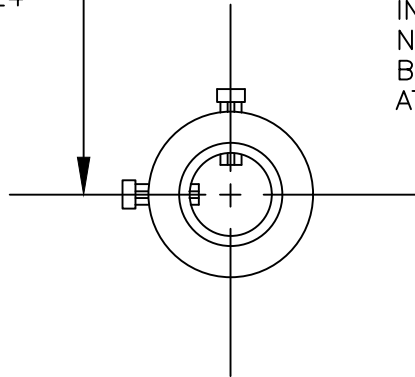


NOTE:  
CARE MUST BE TAKEN TO MAKE  
SURE SIGN COLLAR IS INSTALLED  
IN A TRUE PLUMB POSITION.  
NON-PLUMB INSTALLATION WILL  
BE CORRECTED BY THE CONTRACTOR  
AT NO ADDITIONAL COST TO THE CITY.

NOTE: USE LYLE TYPE SIGN MOUNTING  
BRACKETS, BR-95 OR APPROVED EQUAL

INSTALL COLLAR ASSEMBLY ABOVE  
SURFACE OF WALK, TRAIL OR MEDIAN.

SET SCREWS MUST BE ACCESSABLE  
WITH A WRENCH.

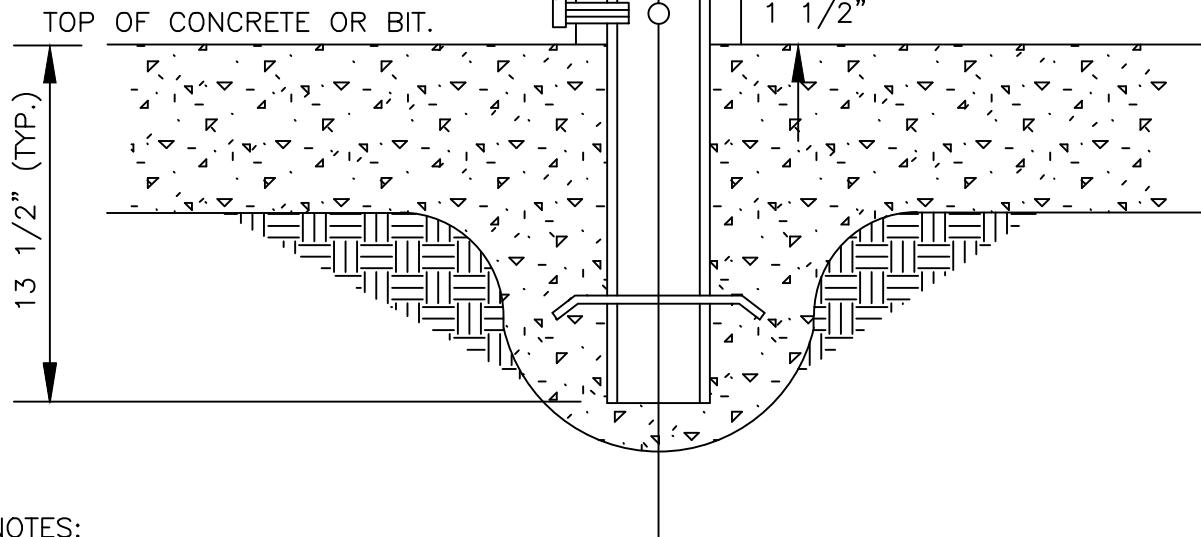

NOTES:

STANDARD COLLAR LENGTH IS 15", EXCEPTIONS  
SHALL BE APPROVED BY THE CITY ENGINEER.

MINNEAPOLIS STYLE SIGN POST ASSEMBLY MUST BE USED.  
USE 2 3/8" OUTSIDE DIAMETER GALVANIZED STEEL SIGN POST.



STANDARD DETAILS  
SIGN POST EMBEDMENT ASSEMBLY  
CITY OF PLYMOUTH

PUBLISHED  
1-24

CITY PL. NO.  
STRT-23  
REVISED 3-11