


ORNAMENTAL
TOP NUT



NOTE: ALL STREET NAME SIGNS
SHALL BE MADE FROM 9" PLATES
WITH 6" LETTERS (SEE STREET
SPEC'S)

PLATE HOLDER
WITH STAR HOLE




INSTALL NO MORE THAN
THREE SIGN BLADES ON
ANY SINGLE POST

GALVINIZED 5/8" SQUARE
CENTER ROD

USE STAINLESS STEEL 5/16" BOLTS,
WASHERS AND NYLON INSERT LOCK
NUTS FOR ALL GROUND AND
OVERHEAD MOUNTED SIGNS.



W14-2A 36" X 8" "NO
OUTLET" SIGN MAY BE
INSTALLED IN CONJUNCTION
WITH THE STREET NAME SIGNS
WHERE A STANDARD W14-2
SIGN DOES NOT WORK.

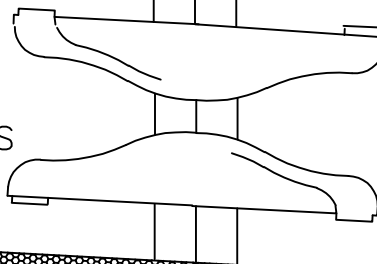


POST CAP, TOP NUT &
PLATE HOLDER SHALL BE
GREEN

9" NAME
PLATES



ROD IS WELDED
TO POST CAP

NOTE:
3" DIA. POST SHALL BE
MOUNTED IN A 10" DIA. BY 3'
DEEP CONCRETE FOOTING
FLARED OUT ON THE BOTTOM. A
DOWEL SHALL BE PLACED
THROUGH THE POST 1' UP
FROM THE BOTTOM OF THE
FOOTING OR THE PIPE CRIMPED.

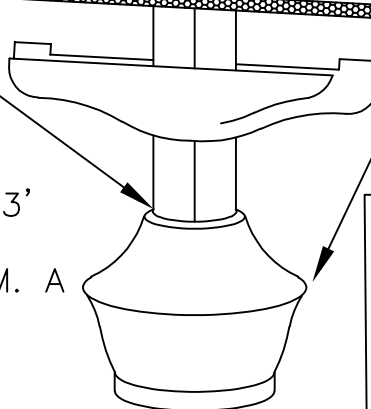

POST CAP WITH TWO
ALLEN SET SCREWS

NOTE:
IF A STOP SIGN IS REQUIRED,
MOUNT ON THE SAME POST
WITH THE STREET NAME
MARKERS. LOWEST SIGN
SHALL BE MOUNTED 7'-8'
ABOVE THE TOP OF CURB.



STANDARD DETAILS
STREET NAME MARKER
CITY OF PLYMOUTH

PUBLISHED
1-20

CITY PL. NO.
STRT-24
REVISED 3-16